

Catalogue number: **LSR6□□□-30**

Residual Current Device 40-63A C,D curve 30mA


Eureka

TOBIN
ELECTRICAL COMPONENTS



Residual Current device

- Earth fault/leakage & residual current protection
- Easy Mounting on 35mm DIN rail
- Instantaneous: 30mA sensitivity
- 2 Pole & 4 Pole
- Rated short circuit 10kA
- Residual fault current indicator
- Standards: Conforming to AS/NZS 61008.1
- Approval: RCM

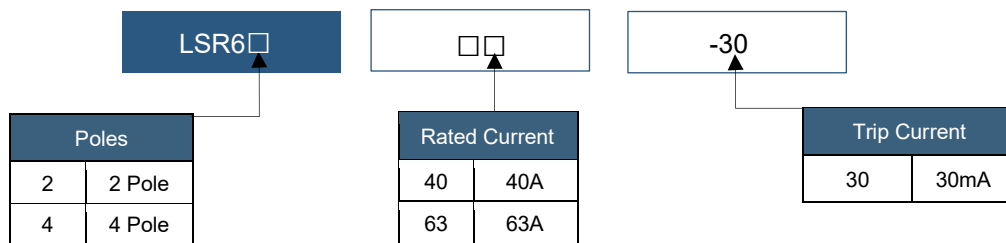

Technical Data

Characteristics	
Product Range	Eureka Residual Current Circuit Breaker
Protection	Earth leakage & Residual Current
Number of poles	2P, 4P
Rated Residual Current	30mA
Rated Current (A)	40A, 63A
Rated Voltage	1+N Pole: 230/240VAC 50/60Hz 3+N Pole: 400/415VAC 50/60Hz
Breaking Capacity	10kA
Rated Impulse Withstand Voltage	4kV
Terminal	Pillar
Terminal capacity	Cables up to 35mm ²
Installation	Mounting on 35mm DIN rail
Endurance Electrical	10,000 operations
Endurance Mechanical	20,000 operations
IP Rating	IP20
Standard	Conforming to IEC/EN 61008-1

Catalogue number: **LSR6**□□□-30

Residual Current Device 40-63A C,D curve 30mA



Dimensions

