

Catalogue number: **LS63035-□□TF-DS**

630A 3 Phase Double Sided MCCB Chassis

**eureka**

**TOBIN**  
ELECTRICAL COMPONENTS



630A 3 Phase Double Sided MCCB Chassis

- Current Rating: 630A
- Insulated Busbar
- IP Rating: IP2X
- 35mm Pitch
- Current withstand Rating 630A: 50kA 0.5s
- Available in bottom feed (BF) or dual feed (DF)
- Standards: IEC 61439-2

LS63035-

□□TF-DS

Number of Poles	
3	3 Pole
6	6 Pole
9	9 Pole
12	12 Pole
15	15 Pole
18	18 Pole
21	21 Pole
24	24 Pole
30	30 Pole
36	36 Pole

## Properties


Properties			
Manufacturer	Eureka		
Product Range	Eureka 630A Dual Sided MCCB Chassis		
Chassis Type	630A Insulated busbar Chassis		
Compatible Product Series	LS MCCB's : TS100, TS160, TS250		
IP Rating	IP2X		
Busbar Dimensions	40x6.3mm <sup>2</sup> Cu		
Pitch	35mm		
Rated Current	In	630A	
Rated Operating Voltage	Un	415V	
Rated Insulation Voltage	Ui	690V	
Rated Frequency	50/60Hz		
Rated Short-time withstand Current	Icw	0.5s	50kA
Rated Diversity Factor	0.8		
Standards Compliance	AS/NZS 61439-2		

Catalogue number: **LS63035-□□TF-DS**


630A 3 Phase Double Sided MCCB Chassis




**Dimensions for LS63035-□□TF-DS**

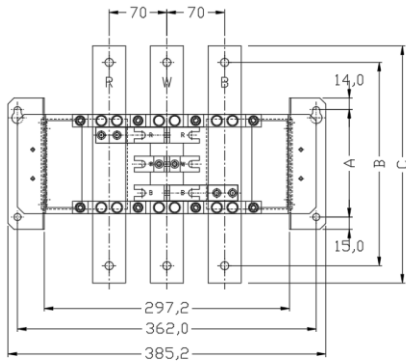


CHASSIS FRONT ELEVATION



CHASSIS SIDE VIEW

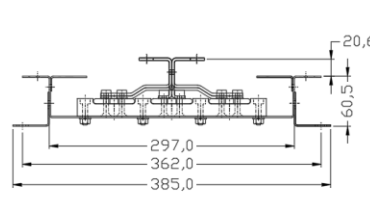

CHASSIS BOTTOM VIEW



ESCUTCHEON CUTOUTS

Part No.	A	B	C	D
LS63035-3TF-DS	130	246	287	109
LS63035-6TF-DS	235	351	392	214
LS63035-9TF-DS	340	456	497	319
LS63035-12TF-DS	445	561	602	424
LS63035-15TF-DS	550	666	707	529
LS63035-18TF-DS	655	771	812	634
LS63035-21TF-DS	760	876	917	739
LS63035-24TF-DS	865	981	1022	844
LS63035-30TF-DS	1075	1191	1232	1054
LS63035-36TF-DS	1285	1401	1442	1264