

Catalogue number: **LS63035-□□TF-SS**

630A 3 Phase Single Sided MCCB Chassis

**eureka**

**TOBIN**  
ELECTRICAL COMPONENTS



630A 3 Phase Single Sided MCCB Chassis

- Current Rating: 630A
- Insulated Busbar
- IP Rating: IP2X
- Current withstand Rating 630A: 50kA 0.5s
- Available in bottom feed (BF) or dual feed (DF)
- Use of EUR-SS800-MCCB-TOP/BOT brackets to lift chassis to meet escutcheon.
- Standards: IEC 61439-2

LS63035-

□□TF-SS


Number of Poles

3	3 Pole
6	6 Pole
9	9 Pole
12	12 Pole
15	15 Pole
18	18 Pole
21	21 Pole
24	24 Pole
30	30 Pole
36	36 Pole


## Properties

Properties			
Manufacturer	Eureka		
Product Range	Eureka 630A Single Sided MCCB Chassis		
Chassis Type	630A Insulated busbar Chassis		
Compatible Product Series	LS MCCB's : TS100, TS160, TS250		
IP Rating	IP2X		
Busbar Dimensions	40x6.3mm <sup>2</sup> Cu		
Pitch	35mm		
Rated Current	In	630A	
Rated Operating Voltage	Un	415V	
Rated Insulation Voltage	Ui	690V	
Rated Frequency	50/60Hz		
Rated Short-time withstand Current	Icw	0.5s	50kA
Rated Diversity Factor	0.8		
Standards Compliance	AS/NZS 61439-2		


**Dimensions for LS63035-□□TF-SS**

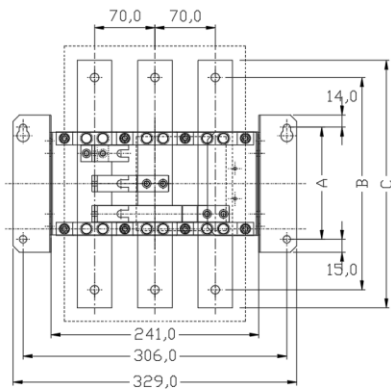

CHASSIS FRONT ELEVATION



CHASSIS SIDE VIEW



CHASSIS BOTTOM VIEW



ESCUTCHEON CUTOUTS

Part No.	A	B	C	D	E
LS63035-3TF-SS	130	246	287	319	109
LS63035-6TF-SS	235	351	392	424	214
LS63035-9TF-SS	340	456	497	529	319
LS63035-12TF-SS	445	561	602	634	424
LS63035-15TF-SS	550	666	707	739	529
LS63035-18TF-SS	655	771	812	844	634
LS63035-21TF-SS	760	876	917	949	739
LS63035-24TF-SS	865	981	1022	1054	844
LS63035-30TF-SS	1075	1191	1232	1264	1054
LS63035-36TF-SS	1285	1401	1442	1474	1264