


Cat alogue number: **LSKBI□P□□**

Switch Disconnecter 63-125A 10kA


Eureka

TOBIN
ELECTRICAL COMPONENTS

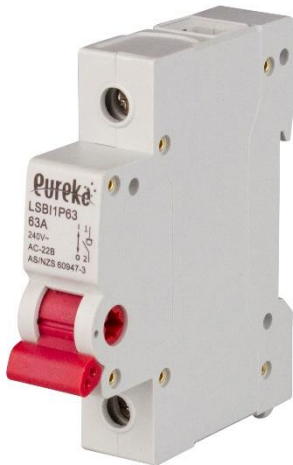

Switch Disconnecter

- Behaviour of an Isolator
- 18mm Pitch
- Easy Mounting on 35mm DIN rail
- 1 Pole, 2 Pole & 3 Pole
- Breaking Capacity 10kA
- Capable of quick release
- Used as Main switch for houses and similar installations
- Standards: Conforming to IEC 60947-3

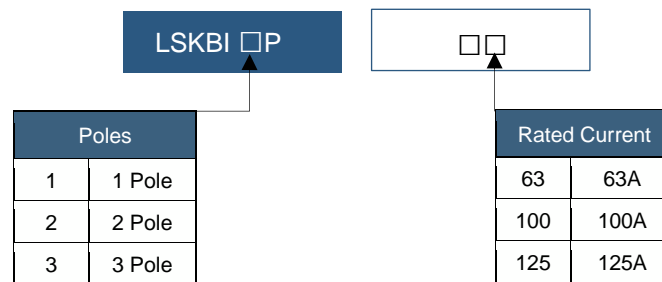

Technical Data

Characteristics	
Product Range	Eureka Miniature Circuit Breaker
Protection	Switch Disconnecter- Isolator
Number of poles	1P, 2P, 3P
Rated Current (A)	63, 100, 125
Rated Voltage	1 Pole: 230/240VAC 50/60Hz 2,3 Pole: 400/415VAC 50/60Hz
Breaking Capacity	10kA
Terminal	Pillar
Terminal capacity	Cables up to 25mm ²
Installation	Mounting on 35mm DIN rail
Width	17.8mm per pole
Endurance Electrical	10,000 operations
Endurance Mechanical	20,000 operations
IP degree	IP20
Standard	Conforming to IEC/EN 60947-3

Catalogue number: **LSBI□P□□**

Switch Disconnector 63-125A 10kA

eureka

TOBIN
ELECTRICAL COMPONENTS

Dimensions

